


<input type="checkbox"/>	REVIEWED & APPROVED FOR FABRICATION (INCLUDING INCOMING ELECTRICAL REQUIREMENTS)
<input type="checkbox"/>	APPROVED FOR FABRICATION WITH NOTED CHANGES (INCLUDING ELECTRICAL REQUIREMENTS REVIEWED)
<input type="checkbox"/>	CHANGES NOTED PLEASE RESUBMIT
SIGNED _____	DATE _____


<input checked="" type="checkbox"/>	421-SPECX MOTORIZED HEPA FILTER MODULE, VOLTAGE 120V/7/60. PREWIRED TO POST-MOUNTED CONTROL PANEL. (2) PROVIDED AS SHOWN.
<input checked="" type="checkbox"/>	2X4' LED PANEL LIGHT FIXTURE, 110V/120V, 117W, 6500 LUMENS, 400K, PREWIRED TO POST-MOUNTED CONTROL PANEL. (9) PROVIDED AS SHOWN.
<input type="checkbox"/>	2X4' BLANK PANELS, WHITE, COVERED GIPSUM WITH ALL EDGES SEALED.
<input type="checkbox"/>	GROSS TEES @ 24" ON CENTER.

**INCOMING ELECTRICAL REQUIREMENTS**  
**15 AMPS @ 120/1/60**  
 FIELD CONNECTIONS ARE MADE AT CONTROL PANEL. SEE BELOW FOR LOCATION.

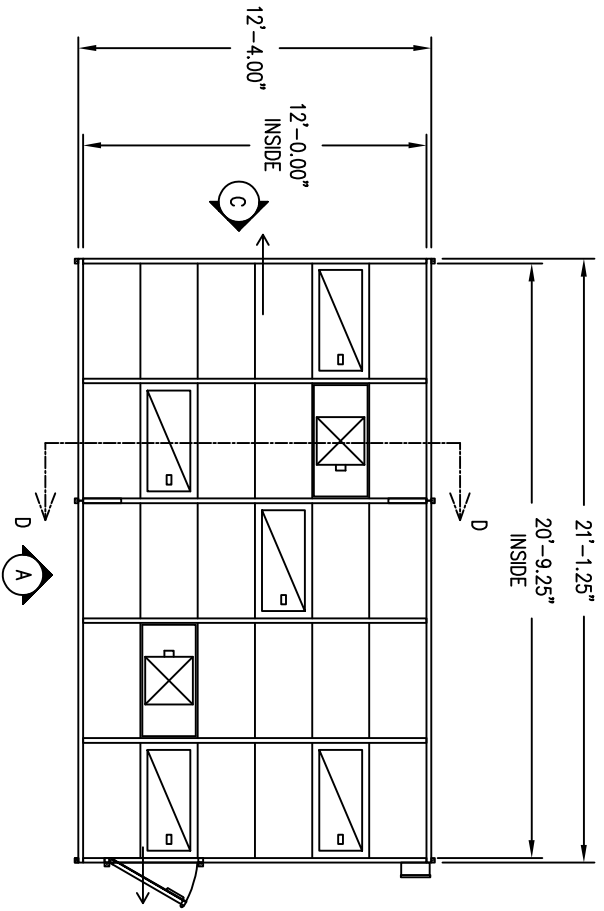

SECTION D-D

WHITE POWDER COATED ALUMINUM FRAMES FITTED WITH 1/4" CLEAR ACRYLIC INSERTS

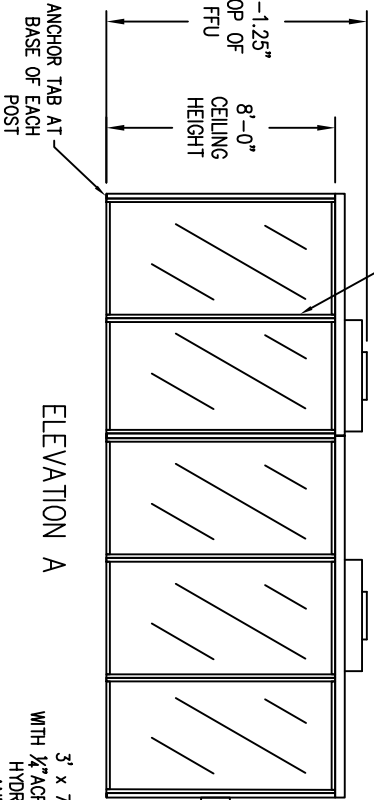

ELEVATION A

ELEVATION B

ELEVATION C

POST-MOUNTED SPEED CONTROL & LIGHT SWITCH  
 POWER REQUIREMENTS: SEE ELECTRICAL REQUIREMENTS BLOCK FOR DETAILS

3' x 7' SWING DOOR WITH 1/4" ACRYLIC INSERTS, HYDRAULIC CLOSER AND ADJUSTABLE SLOTTED DAMPER

SLOTTED ADJUSTABLE EXHAUST LOUVER

