
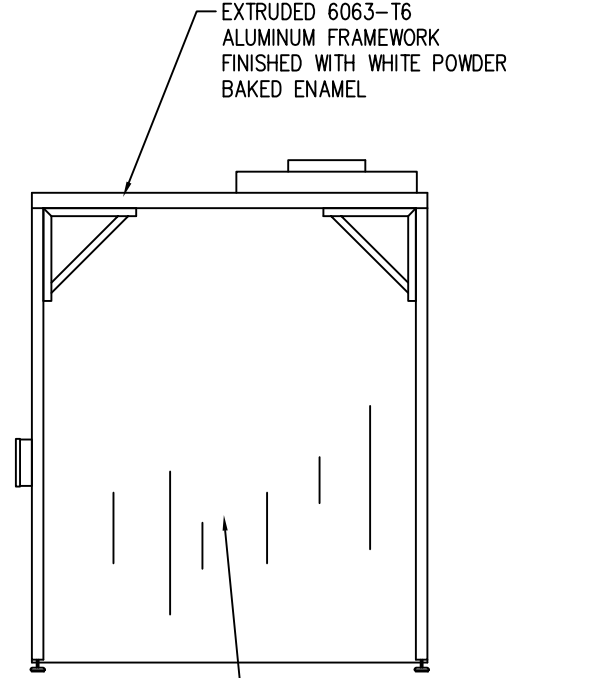


APPROVED FOR FABRICATION  
 APPROVED FOR FABRICATION WITH NOTED CHANGES  
 CHANGES NOTED PLEASE RESUBMIT  
 SIGNED \_\_\_\_\_  
 DATE \_\_\_\_\_

421-SPX MOTORIZED HEPA FILTER MODULE. VOLTAGE 120/1/60. PREWIRED TO LEG MOUNTED CONTROL PANEL.  
 (1) PROVIDED AS SHOWN.  
 \* ENERGY SAVING OPTION AVAILABLE  
 2'X4' LED PANEL LIGHT FIXTURE. UNIV. VOLTAGE: 120-277V. 40W, 4440 LUMENS, 3500K. PREWIRED TO LEG-MOUNTED CONTROL PANEL. (2) PROVIDED AS SHOWN.  
 2'X4' BLANK PANELS. VINYL COVERED GYPSUM WITH ALL EDGES SEALED.  
 \_\_\_\_\_ CROSS TEES @ 24" ON CENTER.

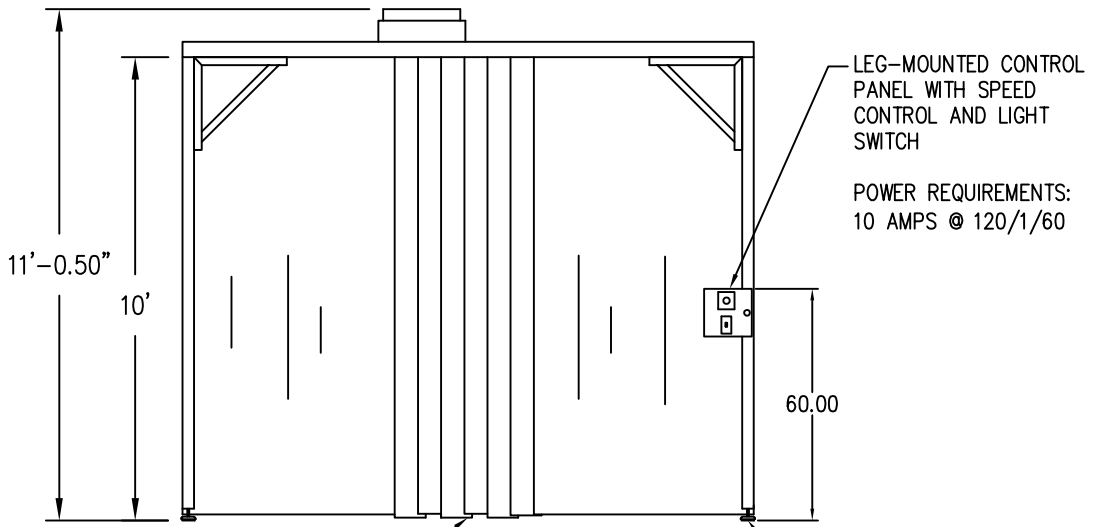

3' WIDE STRIP ENTRY  
 8" WIDE x 80 MIL STRIPS  
 WITH 2" OVERLAP

LEG-MOUNTED CONTROL  
 PANEL WITH SPEED  
 CONTROL AND LIGHT  
 SWITCH  
 POWER REQUIREMENTS:  
 10 AMPS @ 120/1/60

ADJUSTABLE LEVELING PAD  
 AT BASE OF EACH OF THE  
 (4) LEGS

\* CASTER OPTION AVAILABLE

EXTRUDED 6063-T6  
 ALUMINUM FRAMEWORK  
 FINISHED WITH WHITE POWDER  
 BAKED ENAMEL

40 MIL CLEAR STANDARD VINYL  
 CURTAINS AROUND PERIMETER OF  
 ROOM WITH 6" OVERLAP BETWEEN  
 ADJACENT PANELS

\* ANTI-STATIC OPTION AVAILABLE